


# TRENTON®

## Glas-Wrap

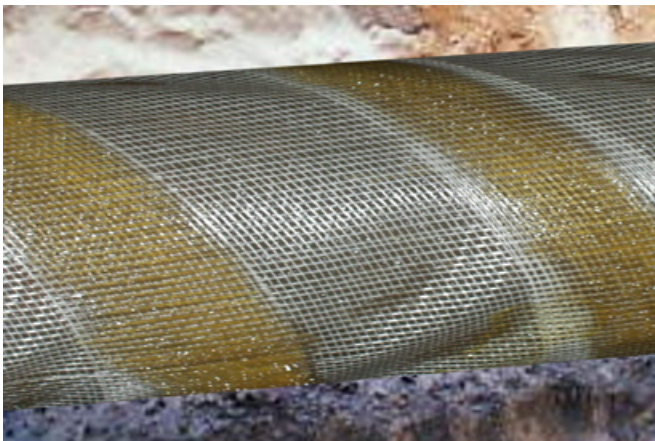

### Description:

Glas-Wrap is a white, resin-coated, woven fiberglass fabric.

### End Use:

Used as an overwrap for Trenton's #1 Wax-Tape for additional protection against backfill and soil stress.

### Application Procedures:

Wearing gloves, apply Glas-Wrap over the #1 Wax-Tape using a 1" overlap, rubbing firmly onto the Wax-Tape.

### Specifications:

Tensile strength..... (per one inch width) 85 lb min.

Thread count per inch:

Wrap threads ..... 20

Fill threads ..... 10

Thickness ..... .005 in.

Color ..... White

### Packaging:

4" x 150' rolls (18 per case)

6" x 150' rolls (12 per case)

12" x 150' rolls (6 per case)

100 sq. yds. per case, 13 lbs per case

### Quantity Requirements:

Pipe Size	Tape Width	Sq. yds./100 ft. (1" overlap)
2"	4"	10
4"	4"	20
6"	4"	29
8"	4"	37
10"	6"	42
12"	6"	49
14"	6"	54
16"	6"	62
18"	6"	69
20"	6"	77
22"	6"	85
24"	6"	92



### DISTRIBUTED BY:

2201 Harbor St, Unit C  
Pittsburg, CA 94565  
Tel: 800.878.8837

302 South 700 West  
Pleasant Grove, UT 84062  
Tel: 801.785.1546

www.corrosioncoatings.com info@corrosioncoatings.com